




GENERAL SPARES CATALOGUE

References 2003

Version G1

CashFlow® Products

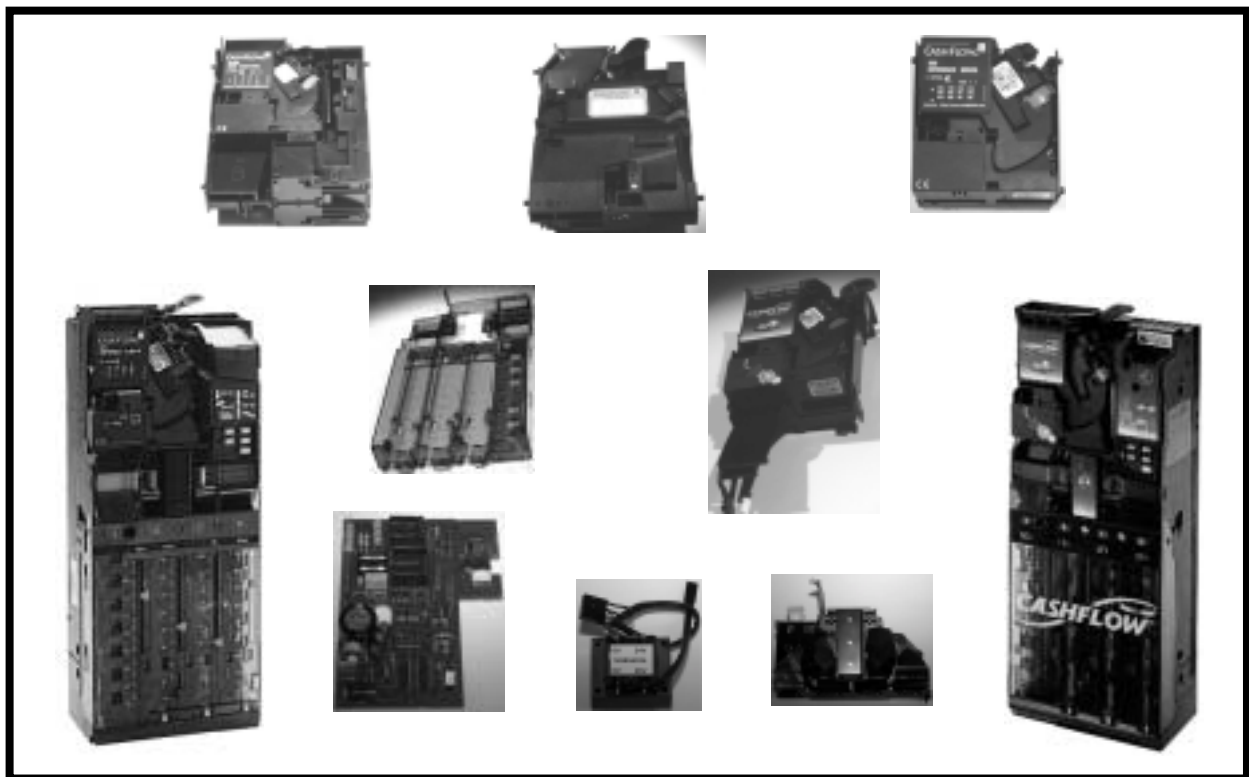

22/02/2003

Published by

MEI
Eskdale Road
Winnersh Triangle
Wokingham, Berkshire, RG41 5AQ
United Kingdom.
Internet: www.meiglobal.com

For information regarding other languages versions of this catalogue please contact your Customer/Technical support representative.

The MEI General Spare Parts Catalogue, Mars®, and the MEI device are registered trademarks.

© Mars Inc., 2003. All rights reserved

Except as permitted under the relevant local legislation, no part of this publication may be copied, transmitted, transcribed, or distributed in any form or by any means, or stored in a database or retrieval system, or translated in any language (natural or computer), without the prior written permission of MEI.

© Mars Inc., 2003.

MEI reserves the right to change the product and product specifications at any time. While every effort has been made to ensure that the information in this publication is accurate, MEI disclaims any liability for any direct or indirect losses (how so ever caused) arising out of use or reliance on this information.

This document does not necessarily imply product availability.

This edition (2003) printed in the United Kingdom.

© Mars Inc., 2003

Table of contents

Published by	3
Change giver Spares	8
Coin Storage Cassettes (EURO).....	8
Coin Storage Cassettes (UK).....	9
Coin Storage Cassettes (OTHER).....	9
Coin Storage Cassette Parts.....	10
Top Prism Housing.....	10
Blue Cassette Clips.....	10
Coin Storage Tubes.....	11
Coin Storage Labels.....	11
Tube Value Labels 1.....	12
Tube Value Labels 2.....	12
Coin Storage Cassette Lock.....	12
Designators.....	13
Change giver Discriminators CF5xx (EURO).....	13
Change giver Discriminators CF5xx (UK).....	14
Change giver Discriminators CF5xx (OTHER).....	15
Change giver Discriminators CF69x (EURO).....	17
Change giver Discriminators CF69x (UK).....	18
Change giver Discriminators CF69x (OTHER).....	18
Change giver Discriminator Back Cover.....	18
Change giver Discriminator Coin Entry Cup.....	19
Change giver Discriminator Reject Lever.....	19
Change giver Discriminator Reject Lever Spring.....	19
Discriminator Hinge Spring.....	19
Change giver Accept Gate Module.....	19
Accept Gate Module Label.....	20
Change giver Exit Plate.....	20
Change giver Separator Module.....	20
Change giver Separator Casing.....	20
Separator Solenoid Bank.....	21
Separator Module Label.....	21
Separator Solenoid Bank Retaining Spring.....	21
Separator Top Level Sensor PCB.....	21
Separator Drive PCB.....	22
Change giver Dispenser Module.....	22
Change giver Dispenser Module PCB.....	22
Change giver Dispenser Crank Arm Inserts.....	22
Change giver Dispenser Motor.....	22
Crank Arm.....	23
Change giver Dispenser Module (Other Parts).....	23
Dispenser Module Gear Case & Cover.....	23
Dispenser Base Plate.....	23
Dispenser Arms.....	24
Change giver Control Boards CF5xx (EURO).....	24
Change giver Control Boards CF5xx (UK).....	25
Change giver Control Boards CF5xx (OTHER).....	26
Change giver Control Boards CF69x.....	29
Change giver Keypad and Spares.....	29
Change giver Transformers.....	30
Fuses.....	30
Control Board Components.....	31
Reservoir Capacitors.....	31
Machine Interface Loom T1 (Executive).....	31
Machine Interface Loom T2 (BDV).....	32
Machine Interface Loom T3 (1 Price).....	32
Machine Interface Loom T4 (4 Price).....	32
Machine Interface Loom T5 (4 Price).....	33
Machine Interface Loom T6 (3 Price).....	33
Machine Interface Loom T7 (4 Price).....	33

Machine Interface Loom T8 (4 Price).....	34
Machine Interface Loom T9 (4 Price).....	34
Machine Interface Loom T10 (Executive+).....	34
Machine Interface Loom T11 (4 Price).....	35
Machine Interface Loom T12 (4 Price).....	35
Machine Interface Loom T13 (4 Price).....	35
Machine Interface Loom T14 (4 Price).....	35
Machine Interface Loom (APR - 6 Price).....	36
CF5xx Machine Interface Loom (MDB).....	36
CF5xx & CF69x MDB Machine Loom.....	36
CF690 MDB Peripheral Loom.....	37
CF691-CF695 Machine Interface Loom (MDB EXT/PSU).....	37
CF69x Machine Interface Loom (Protocol 'A').....	37
CF5xx Machine Interface Loom (Protocol 'A').....	37
Change giver Robust Terminal Loom.....	38
4 & 5 Digit Display Looms.....	38
Credit Displays.....	38
Change giver Spine.....	39
Control Board Back Cover.....	39
Cash Box Route Cover.....	39
Acceptor Retaining Clip.....	39
Grommet Strap.....	39
Blank Grommet (Small).....	40
Blank Grommet (Large).....	40
Mounting Plate.....	40
Fem Cover.....	40
Change giver Labels.....	40
Acceptor/Control Board Loom (CF5xx).....	40
Acceptor/Control Board Loom (CF69x).....	41
Loom Dressing Cover.....	41
BVI.....	42
Bill Validator Module.....	42
Bill Validator Interface and Looms.....	42
Acceptor/Creditor/Totaliser Spares.....	43
Discriminator Components / Software.....	43
Machine Interface Loom (Others).....	43
Acceptor Discriminators (EURO).....	43
Acceptor Discriminators (UK).....	44
Acceptor Discriminators (OTHER).....	45
12 Volt Accept Gate Module.....	46
Acceptor Exit Plates.....	46
Acceptor Interface PCB STD 112.....	46
Acceptor Interface PCB STD 124.....	46
Acceptor Interface PCB STD 2/3.....	47
Acceptor Interface PCB STD 412.....	47
Acceptor Interface PCB STD 424.....	47
Acceptor Interface PCB DUAL POLARITY.....	47
Acceptor Interface VIDEO CREDITOR PCB.....	48
Acceptor Interface PCB Back Cover.....	48
Acceptor Coin Cups.....	48
Acceptor Back Covers (Top Entry).....	48
Acceptor Back Covers (Front Entry).....	49
Remote Rejects.....	49
CF1xx Series Spares.....	50
Acceptor Coin Cups.....	50
CF115/125/126/129 Reject Covers.....	50
CF111/130 Reject Covers.....	50
Reject Levers.....	51
CF95xx Series Spares.....	52
Acceptor Coin Cups.....	52
CF95xx Reject Covers.....	52
Reject Levers.....	52

CF1xx / 95xx Series Spares	53
DCE Bezel (Universal)	53
DCE Bezel (EURO)	53
DCE Bezel (Coin)	53
DCE Bezel (Coin & Token).....	53
DCE Bezel Plate.....	54
Front Entry Bezel.....	54
Bezel Button	54
Bezel Button Accessory	54
Front Plate Mounting Plate.....	55
Bezel Clips.....	55
Y-Chute	55
PCB Cover.....	55
Acceptor Coin Cup Adaptor.....	56
Acceptor Indirect Entry Lid	56
Acceptor Indirect Entry Deck.....	56
Reject Lever Spring.....	56
4-Way Separator Module	57
8-Way Separator Module	57
MS126 Separator Chute Base	57
Front Plates	58
CF1xx / 95xx Miscellaneous Spares	59
Validator Screws	59
Channel Pins	59
CF129 Series Spares	60
Channel	60
Manifold Assembly	60
Manifold Clip (Left)	60
Manifold Clip (Right).....	61
Collar Plate.....	61
ME129 Clip.....	61
CF4xx Selector Spares.....	62
Selector Separator Modules.....	62
Selector Reject Lever	62
Selector to Separator Loom	62
Selector Separator Module Parts	63
CF35x Totaliser Spares.....	64
Credit Displays	64
Totaliser Channel	64
Totaliser Accept Chute	64
Totaliser Reject Chute.....	64
Totaliser Power Supply Units	65
Front Plate Spares.....	66
Front Plates and Accessories (Mini)	66
Front Plates and Accessories (Midi)	66
Front Plate Labels Mini/Midi	66
Front Plates and Accessories (Maxi)	67
Front Plate Labels Maxi.....	67
Adaptor Spares.....	68
4" Adaptor With Mounting Lugs.....	68
5" Adaptor Kits.....	68
Adaptor Chute	69
Adaptor Chute Cover.....	69
Adaptor Chute Type 1 to 4.....	69
Audit Spares	70
Audit 900 Optics Module	70
Audit Advance Optokit.....	70
Audit 900 Printokit	70
Audit 900 Connectokit	71
Audit 900 Optokit 15-Way	71
Audit 900 FEM Module.....	71

Audit Printokit Loom	71
Audit Connectokit Loom	72
Audit Optokit Loom	72
Audit Printer and Spares	72
WSM Spares	73
WSM System	73
Credit Store	73
WSM Spare CD	73
HII Adaptor & Loom	73
Test Stand	74
Route Alpha Spares	75
Route Alpha Terminals	75
Route Alpha Loom	75
Route Alpha Upgrade Software	75
Service Alpha	76
Service Alpha Equipment	76
Service Alpha Product Looms	76
Service Tools	77
CPM	77
CPM Holster	77
CPM Spares	77
Test Box & Loom Kit (EMTB)	78
Test Box & Loom Kit (MITB)	78
MDB Host Simulator Box	78
APPENDIX - A	79
Machine Interface Wiring Tables	79
APPENDIX - B	85
Interface PCB's Pin outs	85
APPENDIX - C	88
Adaptor Pin Positions and Coin Reject Paths	88

Change giver Spares

Coin Storage Cassettes (EURO)



Part Number	Pack Qty	Description	
723120011	1	CF69X EU 10,20,50,1€ CASSETTE	
723121002	1	CF69X EU 5,10,50,20C CASSETTE	
723121007	1	CF69X EU 5,10,20,10C CASSETTE	
723122010	1	CF69X EU 1,5,20,10C CASSETTE	
723123006	1	CF69X EU 10,10,50,20C CASSETTE	
723127004	1	CF69X EU 1,2,50,10C CASSETTE	
723127009	1	CF69X EU 1,5,2,10C CASSETTE	
723127043	1	CF69X EU 1,2,5,20C CASSETTE	
723129003	1	CF69X EU 1,5,50,10C CASSETTE	
723129008	1	CF69X EU 5,5,50,10C CASSETTE	
723129042	1	CF69X EU 50c,1€,2€,2€ CASSETTE	

Coin Storage Cassettes (UK)



Part Number	Pack Qty	Description	
723121024	1	CF69X GB 5,1,2,20P CASSETTE	
723121029	1	CF69X GB 1,20,2,10P CASSETTE	
723123023	1	CF69X GB 5,10,50,20P CASSETTE	
723123028	1	CF69X GB 10,20,50,1£ CASSETTE	
723125022	1	CF69X GB 1,2,5,20P CASSETTE	
723125027	1	CF69X GB 5,20,2,1P CASSETTE	
723127026	1	CF69X GB 5,20,20,10P CASSETTE	
723129025	1	CF69X GB 5,20,50,10P CASSETTE	

Coin Storage Cassettes (OTHER)



Part Number	Pack Qty	Description	
715850001	1	CN 5,25,25,25C CASSETTE	
715863001	1	CN 10,5,25,\$1 CASSETTE	
715907001	1	CN 5,25,25,\$1 CASSETTE	
715910001	1	CN 5,25,\$1,\$2 CASSETTE	
717730008	1	AS 10,50,20,20C CASSETTE	
717734001	1	AS 10,20,20,20C CASSETTE	

Coin Storage Cassette Parts



Part Number	Pack Qty	Description	
159983001	10	TUBE CASSETTE FRONT (NO TUBES)	

This part consists of only the Coin Storage Cassette. It does not include the tubes or designators.

Top Prism Housing



Part Number	Pack Qty	Description	
159865001	500	PRISM HOUSING SCREW	
159878001	10	TOP PRISM HOUSING ASSEMBLY	

Blue Cassette Clips



Part Number	Pack Qty	Description	
159970001	10	TUBE CASSETTE CLIPS (BLUE)	

Coin Storage Tubes



Part Number	Pack Qty	Description	
159830205	5	No. 5 TUBE	
159831012	5	No. 5.5 TUBE	
159832003	5	No. 3 TUBE MACHINED	
159832204	5	No. 4 TUBE	
159833011	5	No. 3.5 TUBE	
159834002	5	No. 6.5 TUBE	
159834203	5	No. 3 TUBE	
159835010	5	No. 2.5 TUBE	
159836001	5	No. 4.5 TUBE	
159836023	5	No. 2.3 TUBE	
159836202	5	No. 2 TUBE	
159836207	5	No. 7 TUBE	
159838201	5	No. 1 TUBE	
159838206	5	No. 6 TUBE	

Coin storage tubes can be fitted to all CF5xx and CF69x change givers. Each coin tube supports a specific coin diameter. Please refer to the coin/tube data sheet available from MEI.

Coin Storage Labels



Part Number	Pack Qty	Description	
159894001	10	LIGHT SHIELD LABEL	

Change giver Spares

Tube Value Labels 1



Part Number	Pack Qty	Description	
728951002	1	TUBE VALUE LABEL EU 1,5,50,10C	
728951007	1	TUBE VALUE LABEL EU 5,5,50,10C	
728952010	1	TUBE VALUE LABEL EU 10,20,50,1€	
728953001	1	TUBE VALUE LABEL EU 5,10,50,20C	
728953006	1	TUBE VALUE LABEL EU 5,10,20,10C	
728955005	1	TUBE VALUE LABEL EU 10,10,50,20C	
728959003	1	TUBE VALUE LABEL EU 1,2,50,10C	

Tube Value Labels 2



Part Number	Pack Qty	Description	
198580004	1	TUBE CASSETTE LABEL GB 5,10,50,20P	
198584007	1	TUBE CASSETTE LABEL EU 5,10,50,20C	
198588005	1	TUBE CASSETTE LABEL ZA 10,20,2,50C	

Coin Storage Cassette Lock



Part Number	Pack Qty	Description	
167303001	100	TUBE CASSETTE LOCK	

You can increase security by fixing the change giver's coin storage cassette in to place with this unique identified tamper-proof lock. This lock does not need a key as it is a one time fit. To remove it you will require a pair of cutters.

Changegiver Spares

Designators



Part Number	Pack Qty	Description	
159841103	5	C' DESIGNATOR (YELLOW)	
159843102	5	B' DESIGNATOR (ORANGE)	
159845106	5	F' DESIGNATOR (VIOLET)	
159846011	5	A' DESIGNATOR (RED)	
159847105	5	E' DESIGNATOR (BLUE)	
159848010	5	G' DESIGNATOR (BLACK)	
159849104	5	D' DESIGNATOR (GREEN)	
159849109	5	K' DESIGNATOR (GREY)	

Colour coded Designators (for easy identification) are available to suit a variety of coin thickness. Please refer to the coin/tube data sheet available from MEI to find out which will suit your coin type.

Changegiver Discriminators CF5xx (EURO)



Part Number	Pack Qty	Description	
171210146	1	CF5XX DISCRIMINATOR EU/TKN'0491 D/O	
171215157	1	CF5XX DISCRIMINATOR EU'5468 D/A	

Changegiver Discriminators spares are available for both the CF5xx and CF69x changegivers. The discriminator is supplied with the back cover, reject lever mechanism and a separator PCB. The accept gate module is purchased separately. The discriminator deck are supplied as:- D/A = Dry Aiding, D/O = Dry Opposing and W/A = Wet Aiding, W/O = Wet Opposing.

Changegiver Spares

**Changegiver Discriminators CF5xx
(UK)**



Part Number	Pack Qty	Description	
171217156	1	CF5XX DISCRIMINATOR GB/TKN'1689 D/A	
171219030	1	CF5XX DISCRIMINATOR GB'3688 D/A	
171219155	1	CF5XX DISCRIMINATOR GB'3688 CC D/A	

Changegiver Discriminators spares are available for both the CF5xx and CF69x changegivers. The discriminator is supplied with the back cover, reject lever mechanism and a separator PCB. The accept gate module is purchased separately. The discriminator deck are supplied as:- D/A = Dry Aiding, D/O = Dry Opposing and W/A = Wet Aiding, W/O = Wet Opposing.

Changegiver Spares

**Changegiver Discriminators CF5xx
(OTHER)**



Part Number	Pack Qty	Description	
171210124	1	CF5XX DISCRIMINATOR PL'4490 D/A	
171210129	1	CF5XX DISCRIMINATOR NZ'7228 D/A	
171211132	1	CF5XX DISCRIMINATOR RU'4912 D/A	
171211137	1	CF5XX DISCRIMINATOR IS'8236 D/A	
171211154	1	CF5XX DISCRIMINATOR LV'9788 D/A	
171211159	1	CF550 DISCRIMINATOR RI'0659 W/A	
171212123	1	CF5XX DISCRIMINATOR PH'4772 W/A	
171212128	1	CF5XX DISCRIMINATOR NO'7245 D/A	
171213131	1	CF5XX DISCRIMINATOR AS'3188 D/A	
171213136	1	CF5XX DISCRIMINATOR SW'0372 D/A	
171213153	1	CF5XX DISCRIMINATOR SG'8552 W/A	
171213158	1	CF5XX DISCRIMINATOR CZ'1248 D/A	
171214122	1	CF5XX DISCRIMINATOR ZA'8095 W/A	
171214127	1	CF5XX DISCRIMINATOR DK'5305 D/A	
171215118	1	CF5XX DISCRIMINATOR CN/US'6330 D/A	
171215130	1	CF5XX DISCRIMINATOR CH'6215 D/A	
171215152	1	CF5XX DISCRIMINATOR SK'7309 D/A	
171216121	1	CF5XX DISCRIMINATOR ML'7304 D/A	
171216126	1	CF5XX DISCRIMINATOR TU'1569 D/A	
171216160	1	CF550 DISCRIMINATOR HK'8530 W/A	
171217117	1	CF5XX DISCRIMINATOR MA'7647 W/A	
171217134	1	CF5XX DISCRIMINATOR ME'1363 W/O	

Changegiver Spares

**Changegiver Discriminators CF5xx
(OTHER)**



171217139	1	CF5XX DISCRIMINATOR CL'2577 W/A	
171217151	1	CF520 DISCRIMINATOR UAE'9582 W/A	
171218120	1	CF5XX DISCRIMINATOR TH'8297 W/A	
171218142	1	CF550 DISCRIMINATOR TW'6553 W/A	
171218147	1	CF560 DISCRIMINATOR UAE'9582 W/A	
171219138	1	CF550 DISCRIMINATOR CA'3943 W/A	
171298002	1	CF5XX DISCRIMINATOR HU'4233 D/A	
724609019	1	CF5XX DISCRIMINATOR VE'6079 W/A	

Changegiver Spares

**Changegiver Discriminators CF69x
(EURO)**



Part Number	Pack Qty	Description	
724600027	1	CF690 DISCRIMINATOR SF/EU D/A	
724602026	1	CF690 DISCRIMINATOR IT/EU D/A	
724606024	1	CF690 DISCRIMINATOR EU/NL '7102 D/A	
724606029	1	CF690 DISCRIMINATOR FR/EU D/A	
724608023	1	CF690 DISCRIMINATOR EU/BE'1100 D/A	
724608028	1	CF690 DISCRIMINATOR EI/EU D/A	
725241002	1	CF690 DISCRIMINATOR EU/ES'4097 D/A	
729451011	1	CF694 DISCRIMINATOR EU/FR/TKN'0158 D/A	
729453010	1	CF694 DISCRIMINATOR EU/ES'4097 D/A	
729456005	1	CF690 DISCRIMINATOR DK/EU'1183 D/A	
729458009	1	CF694 DISCRIMINATOR DE/EU'0099 D/O	
729459012	1	CF694 DISCRIMINATOR EU/ES'4097 AQUA	

Changegiver Discriminators spares are available for both the CF5xx and CF69x changegivers. The discriminator is supplied with the back cover, reject lever mechanism and a separator PCB. The accept gate module is purchased separately. The discriminator deck are supplied as:- D/A = Dry Aiding, D/O = Dry Opposing and W/A = Wet Aiding, W/O = Wet Opposing.

**Changegiver Discriminators CF69x
(UK)**



Part Number	Pack Qty	Description	
724601013	1	CF690 DISCRIMINATOR GB/EU'6096 D/A	
724605016	1	CF691 DISCRIMINATOR GB'6096 AQUA	
724606007	1	CF690 DISCRIMINATOR GB '6096 D/A	

Changegiver Discriminators spares are available for both the CF5xx and CF69x changegivers. The discriminator is supplied with the back cover, reject lever mechanism and a separator PCB. The accept gate module is purchased separately. The discriminator deck are supplied as:- D/A = Dry Aiding, D/O = Dry Opposing and W/A = Wet Aiding, W/O = Wet Opposing.

**Changegiver Discriminators CF69x
(OTHER)**



Part Number	Pack Qty	Description	
724205012	1	CF690 DISCRIMINATOR SW/EU'8176 D/A	
729454006	1	CF694 DISCRIMINATOR IS'6194 AQUA	

Changegiver Discriminators spares are available for both the CF5xx and CF69x changegivers. The discriminator is supplied with the back cover, reject lever mechanism and a separator PCB. The accept gate module is purchased separately. The discriminator deck are supplied as:- D/A = Dry Aiding, D/O = Dry Opposing and W/A = Wet Aiding, W/O = Wet Opposing.

Changegiver Discriminator Back Cover



Part Number	Pack Qty	Description	
172437001	10	CHANGER BACK COVER ASSEMBLY	

This Back Cover Assembly comes fitted with the reject lever and lever spring. The coin entry cup if required, will need to be ordered separately.

Change giver Spares

Change giver Discriminator Coin Entry Cup



Part Number	Pack Qty	Description	
185530001	10	CHANGER COIN CUP	

Change giver Discriminator Reject Lever



Part Number	Pack Qty	Description	
172424001	5	CHANGER REJECT LEVER	

Change giver Discriminator Reject Lever Spring



Part Number	Pack Qty	Description	
172411001	10	CHANGER REJECT LEVER SPRING	

Discriminator Hinge Spring



Part Number	Pack Qty	Description	
149835011	100	DISCRIMINATOR HINGE SPRING	

Change giver Accept Gate Module



Part Number	Pack Qty	Description	
791245001	1	ACCEPT GATE MODULE 12V ARD,RLD CF5XX/69X	

Change giver accept gate modules are supplied without the safety voltage warning label. When ordering a replacement accept gate module you will need to order the appropriate label separately.

Accept Gate Module Label



Part Number	Pack Qty	Description	
194140002	1	ACCEPT GATE VOLTAGE LABEL (CE)	
724124001	1	ACCEPT GATE MODULE LABEL (PALM TOP)	

Change giver Exit Plate



Part Number	Pack Qty	Description	
188635001	50	RIGHT HAND EXIT PLATE	

Exit plates are fitted to all MEI CASHFLOW® discriminators. It is very important to order the correct type of exit plate, otherwise coin jams may occur. Accept Right exit plates are used on discriminators where the accepted coins are routed to the right.

Change giver Separator Module



Part Number	Pack Qty	Description	
149838023	1	CHANGER SEPARATOR ASSEMBLY	

The change giver separator assembly comes complete with solenoid, top level sense PCB and loom. This separator assembly can be fitted to both CF5xx and CF69x change givers. A separator label can be ordered separately.

Change giver Separator Casing



Part Number	Pack Qty	Description	
189076001	1	CHANGER SEPARATOR CASING	

Separator Solenoid Bank



Part Number	Pack Qty	Description	
702273001	1	CHANGER SOLENOID BANK	

Separator Module Label



Part Number	Pack Qty	Description	
724119002	1	69X SEPARATOR DIAGNOSTIC LABEL	

Separator Solenoid Bank Retaining Spring



Part Number	Pack Qty	Description	
160026001	100	SOLENOID RETAINING SPRING	

Separator Top Level Sensor PCB



Part Number	Pack Qty	Description	
160013001	1	SEPARATOR TOP LEVEL SENSE PCB	

Change giver Spares

Separator Drive PCB



Part Number	Pack Qty	Description	
172448002	5	SEPARATOR DRIVE PCB	

Change giver Dispenser Module



Part Number	Pack Qty	Description	
724268001	1	CF5xx / 69x DISPENSER MODULE	

Change giver Dispenser Module PCB



Part Number	Pack Qty	Description	
724271001	1	CF5xx / 69x DISPENSER PCB	

Change giver Dispenser Crank Arm Inserts



Part Number	Pack Qty	Description	
185501001	4	DISPENSER CRANK ARM INSERTS	

Change giver Dispenser Motor



Part Number	Pack Qty	Description	
172392010	20	DISPENSER MOTOR + WORM GEAR	

Change giver Spares

Crank Arm



Part Number	Pack Qty	Description	
172391002	100	DISPENSER CRANK ARM + MAGNET	

Change giver Dispenser Module (Other Parts)



Part Number	Pack Qty	Description	
172395005	100	DISPENSER IDLER GEAR	
172397004	100	DISPENSER OUTPUT GEAR	
172399003	100	DISPENSER DRIVE SHAFT	
172399008	100	DISPENSER CLUTCH PIN	
719794001	5	DISPENSER HALL EFFECT SWITCH	

Dispenser Module Gear Case & Cover



Part Number	Pack Qty	Description	
198162001	5	DISPENSER GEAR CASE & COVER	

Dispenser Base Plate



Part Number	Pack Qty	Description	
160048003	5	MK2 DISPENSER BASEPLATE	

Change giver Spares

Dispenser Arms



Part Number	Pack Qty	Description	
159818002	5	MK2 DISPENSER SCAVENGE ARM	
159821007	5	DISPENSER DRAG LINK ARM 'C4'	
159822010	5	DISPENSER DRAG LINK ARM 'D3B'	
159827009	5	DISPENSER DRAG LINK ARM 'B4'	
159829008	5	DISPENSER DRAG LINK ARM 'A2'	

**Change giver Control Boards CF5xx
(EURO)**



Part Number	Pack Qty	Description	
192250017	1	CF560 EXECUTIVE PLUS CONTROL BOARD EU 5,10,50,20	
196576090	1	CF560 4 PRICE CONTROL BOARD EU 5,10,50,20	
705485005	1	CF560 BDV CONTROL BOARD EU 10,50,2E,1E	
709894008	1	560 MDB CONTROL BOARD EU 5,10,50,20	

**Change giver Control Boards CF5xx
(UK)**



Part Number	Pack Qty	Description	
185810001	1	540 1PRICE/MDB CONTROL BOARD GB 5,10,50,20	
185811058	1	560 EXEC PLUS CONTROL BOARD GB 1,2,5,20	
185811433	1	560 4PRICE CONTROL BOARD GB 1,2,5,20	
185814026	1	560 EXECUTIVE CONTROL BOARD GB 1,2,5,20	
185814705	1	560 MDB CONTROL BOARD GB 5,1,2,20	

Changeiver Spares

**Changeiver Control Boards CF5xx
(OTHER)**



Part Number	Pack Qty	Description	
183241525	1	560 4PRICE CONTROL BOARD ML 1,5,10,25	
185810523	1	560 4PRICE CONTROL BOARD DK 25,1,2,5	
185811715	1	560 MDB CONTROL BOARD CN/US 10,5,25,1	
185812740	1	560 MDB CONTROL BOARD CZ 1,2,2,5	
185813552	1	560 4PRICE CONTROL BOARD IS 10,50,1,5	
185814504	1	560 4PRICE CONTROL BOARD ME 50,50,1,2	
185814560	1	560 4PRICE CONTROL BOARD SW 50,1,5,1	
185814761	1	560 MDB CONTROL BOARD ZA 10,50,1,2	
185814766	1	560 MDB CONTROL BOARD CN 10,5,25,1	
185815095	1	560 EXEC PLUS CONTROL BOARD CZ 1,2,2,5	
185815517	1	560 4PRICE CONTROL BOARD PO 5,50,20,10	
185815610	1	550 6PRICE CONTROL BOARD SG 10,20,50,1	
185815779	1	560 BDV CONTROL BOARD ZA 50,1,2,5	
185816003	1	560 EXECUTIVE PLUS CONTROL BOARD NO 10,1,1,5	
185816042	1	560 EXECUTIVE CONTROL BOARD ME 50,50,1,2	
185816581	1	560 4PRICE CONTROL BOARD CZ 1,2,2,5	
185816586	1	560 4PRICE CONTROL BOARD HU 5,5,10,20	
185816760	1	560 MDB CONTROL BOARD HU 5,5,10,20	
185816851	1	560 4PRICE CONTROL BOARD CZ 1,2,2,5	
185817119	1	540 1PRICE CONTROL BOARD CN/US 10,5,25,1	
185818024	1	560 EXECUTIVE CONTROL BOARD ZA 10,20,1,50	
185818742	1	560 MDB CONTROL BOARD SW 1,1,5,1	

Changeiver Spares

**Changeiver Control Boards CF5xx
(OTHER)**



185821029	1	520 MDB CONTROL BOARD UAE 25,50o,50n	
185828713	1	520 MDB CONTROL BOARD BL 5,10,25	
185829008	1	520 EXECUTIVE CONTROL BOARD ME 50,1,2	
192251025	1	560 EXECUTIVE CONTROL BOARD SW 50,1,5,1	
192251047	1	550 EXECUTIVE CONTROL BOARD TW 1,5,10,50N	
192252011	1	560 EXECUTIVE CONTROL BOARD AS 10,50,20,20	
192253024	1	560 EXECUTIVE PLUS CONTROL BOARD SK 1,2,2,5	
192253041	1	540 EXECUTIVE CONTROL BOARD CN/US 10,5,25,1	
192254054	1	560 EXECUTIVE PLUS CONTROL BOARD PL 10,50,20,1	
192254113	1	560 EXECUTIVE CONTROL BOARD UA 50,50N,1,1N	
192255040	1	560 EXECUTIVE CONTROL BOARD DK 50,1,2,5	
192255089	1	560 EXECUTIVE CONTROL BOARD RU 50,1,5,2	
192283417	1	530 4PRICE CONTROL BOARD CL 10,10,50	
192284702	1	530 MDB CONTROL BOARD ME 10,50,1	
192288004	1	530 EXECUTIVE CONTROL BOARD ME 10,50,1	
192289030	1	530 1PRICE CONTROL BOARD ME 10,50,1,1	
195672001	1	540 4PRICE CONTROL BOARD AS 10,50,20,20	
196302003	1	350 MULTI PRICE EXECUTIVE PLUS CONTROL BOARD UA	
196572014	1	560 4PRICE/MDB CONTROL BOARD UA25,25,50,50	
196574013	1	560 4PRICE CONTROL BOARD PE 10,20,1S,50	
196578055	1	540 4PRICE CONTROL BOARD PH 1,1,5,5	
703243002	1	540 MICROMECH CONTROL BOARD CN 10,5,25,1	
703261001	1	540 MICROMECH CONTROL BOARD CN/US10,5,25,1	

Change giver Spares

**Change giver Control Boards CF5xx
(OTHER)**



703430009	1	540 4PRICE/MDB CONTROL BOARD DK 10,1,2,5	
703434007	1	540 4PRICE/MDB CONTROL BOARD NO 10,1,1,5	
703436006	1	540 4PRICE/MDB CONTROL BOARD SW 50,1,5,1	
705481002	1	560 BDV CONTROL BOARD PL 10,50,20,1	
705484793	1	560 MDB CONTROL BOARD DK 10,1,2,5	
705486116	1	560 MDB CONTROL BOARD IS 1,10,5,10	
709890005	1	560 MDB CONTROL BOARD RU 1,2,5,2	
709892009	1	540 MDB CONTROL BOARD ZA 10,20,2R,50	
709898006	1	560 EXEC CONTROL BOARD BG 10,5,10,20	
714310035	1	560 4PRICE/MDB CONTROL BOARD HU 1,5,20,10	
714314038	1	540C 4PRICE/MDB CONTROL BOARD ME 50,50,1,2	
714316032	1	560 4PRICE/MDB CONTROL BOARD HU 5,20,50,10	
714318019	1	560 4PRICE/MDB CONTROL BOARD IS 10,50,1,5	
717056001	1	540S MDB CONTROL BOARD BL 5,10,50,25	
717069001	1	540S 2PRICE CONTROL BOARD BL 5,10,50,25	
719787003	1	541 MDB CONTROL BOARD CN 5,25,25,25	

Control Boards are supplied individually. The list shows the part number for a control board relating to it's interface type, payout option and country code.

Changegiver Control Boards CF69x



Part Number	Pack Qty	Description	
724195001	1	CF691 1PRICE CONTROL BOARD (FLUORAD COATED)	
724200001	1	CF694 4PRICE/MDB CONTROL BOARD (FLUORAD COATED)	
724213001	1	CF694 4PRICE/MDB CONTROL BOARD	
724224002	1	CF695 4PRICE/MDB/BDV/EXECUTIVE CONTROL BOARD	
724226001	1	CF690 MDB/BDV/EXECUTIVE CONTROL BOARD	
724242001	1	CF690 PLUS MDB/BDV/EXECUTIVE CONTROL BOARD	
724255001	1	CF690 MDB/BDV/EXECUTIVE CONTROL BOARD (FLUORAD)	

Changegiver Keypad and Spares



Part Number	Pack Qty	Description	
160259001	20	KEYPAD COVER FLAP SPRING	
160262001	10	KEYPAD COVER FLAP	
160288001	1	CF5XX KEYPAD	
724140001	5	CF69X KEYPAD LCD LOOM	
724153001	5	CF69X KEYPAD LCD PCB	
724166001	1	CF69X KEYPAD & DISPLAY	

Change giver Transformers



Part Number	Pack Qty	Description	
159850024	1	20.4-26.4 VOLT TRANSFORMER	
159850100	1	85-121 VOLT TRANSFORMER	
159850220	1	187-242 VOLT TRANSFORMER	
159852006	1	212-264 VOLT TRANSFORMER	
159854120	1	95-132 VOLT TRANSFORMER	

Fuses



Part Number	Pack Qty	Description	
160065315	20	3.15AMP FUSE	
160066080	20	1AMP FUSE (BDV)	
160068160	20	1.6AMP FUSE	

Control Board Components



Part Number	Pack Qty	Description	
172480002	20	CHANGER DISPLAY ASIC 28PLC	
172488003	20	CHANGER ASIC 68PLC	
712019001	5	CF550 6PRICE Y2.4 SOFTWARE	
791601001	5	CF5XX EXEC/EM SOFTWARE	
721885103	1	CF69X CONTROL BOARD MICRO PROCESSOR (U208)	
721890102	1	CF69X CONTROL BOARD DISPLAY PROCESSOR (U701)	
723649001	5	CF5XX VS V2.06 SOFTWARE	
730319001	5	CF5XX MDB V3.00 SOFTWARE	

Reservoir Capacitors



Part Number	Pack Qty	Description	
160321015	5	CF5XX DUAL I/F CAPACITOR	
706662001	5	CF560 MDB/BDV CAPACITOR	

Machine Interface Loom T1 (Executive)



Part Number	Pack Qty	Description	
135909001	1	MACHINE LOOM T1 EXEC	

The T1 Executive power loom connects to various serial interface (protocol A) machines fitted with a 15-way Molex connector. As this loom only provides power to the change giver, a protocol 'A' loom will also be required. See also T10 (Exec+) Loom.

Machine Interface Loom T2 (BDV)



Part Number	Pack Qty	Description
135894001	1	MACHINE LOOM T2 BDV

The T2 (BDV) machine interface loom is for connection to a serial BDV machine fitted with a 9-way Amp Mate 'n' Lock connector.

Machine Interface Loom T3 (1 Price)



Part Number	Pack Qty	Description
135976003	1	MACHINE LOOM T3 1PRICE

The T3 (1 Price) machine interface loom is for connection to various Electro-mechanical machines fitted with an 8-way Jones plug connector.

Machine Interface Loom T4 (4 Price)



Part Number	Pack Qty	Description
135974004	1	MACHINE LOOM T4 4PRICE

The T4 (4 Price) machine interface loom is for connection to various Electro-mechanical machines fitted with an 8-way Jones plug connector.

Machine Interface Loom T5 (4 Price)



Part Number	Pack Qty	Description
135972005	1	MACHINE LOOM T5 4PRICE

The T5 (4 Price) machine interface loom is for connection to various Electro-mechanical machines fitted with an 15-way Molex plug connector.

Machine Interface Loom T6 (3 Price)



Part Number	Pack Qty	Description
135970006	1	MACHINE LOOM T6 3PRICE

The T6 (3 Price) machine interface loom is for connection to various Electro-mechanical machines fitted with an 8-way Jones plug connector.

Machine Interface Loom T7 (4 Price)



Part Number	Pack Qty	Description
135978007	1	MACHINE LOOM T7 4PRICE

The T7 (4 Price) machine interface loom is for connection to various Electro-mechanical machines fitted with an 12-way Amp Mate 'n' Lock connector.

Machine Interface Loom T8 (4 Price)



Part Number	Pack Qty	Description
135976008	1	MACHINE LOOM T8 4PRICE

The T8 (4 Price) machine interface loom is for connection to various Electro-mechanical machines fitted with an 15-way Amp Mate 'n' Lock connector.

Machine Interface Loom T9 (4 Price)



Part Number	Pack Qty	Description
135974009	1	MACHINE LOOM T9 4PRICE

The T9 (4 Price) machine interface loom is for connection to various Electro-mechanical machines fitted with an 18-way Coca Cola plug.

Machine Interface Loom T10 (Executive+)



Part Number	Pack Qty	Description
717819010	1	MACHINE LOOM T10 EXEC PLUS

The T10 (Exec+) machine interface loom is for connection to various Serial interface (Protocol A) machines where the Exact Change light is controlled by the change giver. It's supplied with a 15-way Molex connector. See also T1 Executive loom.

Machine Interface Loom T11 (4 Price)



Part Number	Pack Qty	Description
135967001	1	MACHINE LOOM T11 4PRICE C/RELAY

The T11 (4 Price) machine interface loom is for connection to various Electro-mechanical machines with a built in credit relay. It's fitted with a 15-way Molex plug and a 4-way Molex connector.

Machine Interface Loom T12 (4 Price)

Part Number	Pack Qty	Description
162942001	1	MACHINE LOOM T12 4PRICE + CREDIT RELAY

The T12 (4 Price) machine interface loom is for connection to various Electro-mechanical machines with a built in credit relay. It's fitted with a 15-way Molex plug connector.

Machine Interface Loom T13 (4 Price)



Part Number	Pack Qty	Description
135973013	1	MACHINE LOOM T13 4PRICE

The T13 (4 Price) machine interface loom is for connection to various Electro-mechanical machines fitted with a 12-way Mate 'n' Lock connector.

Machine Interface Loom T14 (4 Price)



Part Number	Pack Qty	Description
135971014	1	MACHINE LOOM T14 4PRICE

The T14 (4 Price) machine interface loom is for connection to various Electro-mechanical machines fitted with a 12-way Mate 'n' Lock connector.

Machine Interface Loom (APR - 6 Price)



Part Number	Pack Qty	Description
170828002	1	MACHINE LOOM 6PRICE

This APR (6 price) machine interface loom is intended for use with change givers operated in the APR region. It allows connection to various Electro-mechanical machines fitted with an 10-way Jones plug.

CF5xx Machine Interface Loom (MDB)



Part Number	Pack Qty	Description
183703001	1	CF5XX MACHINE LOOM MDB

CF5xx & CF69x MDB Machine Loom



Part Number	Pack Qty	Description
160323014	1	CF5XX & CF69X MDB MACHINE LOOM

This MDB (Multi-interface) loom is one of the two optional interfaces offered with Multi-interface products. The other is a 4/1 price Electro-mechanical interface.

CF690 MDB Peripheral Loom



Part Number	Pack Qty	Description	
724080001	1	CF690 MDB PERIPHERAL LOOM	

CF691-CF695 Machine Interface Loom (MDB EXT/PSU)



Part Number	Pack Qty	Description	
724093001	1	CF691 - CF695 MACHINE LOOM MDB EXT/PSU	

CF69x Machine Interface Loom (Protocol 'A')



Part Number	Pack Qty	Description	
728788001	1	CF690 MACHINE LOOM PROTOCOL 'A' PLUS FERITE	

CF5xx Machine Interface Loom (Protocol 'A')



Part Number	Pack Qty	Description	
160348001	1	CF5XX MACHINE LOOM PROTOCOL 'A'	

This is the Protocol 'A' loom used for all Executive serial interface machines. It controls the serial communication between the changeiver and the vending machine. It's normally used together with either a T1 or T10 interface loom.

Changegiver Robust Terminal Loom



Part Number	Pack Qty	Description	
160335001	1	ROBUST TERMINAL LOOM	

The Robust Terminal Loom is used for connecting machine peripherals (e.g. a Bill Validator Interface) via the HII serial link.

4 & 5 Digit Display Looms



Part Number	Pack Qty	Description	
160351001	1	5-DIGIT' DISPLAY LOOM	
160364001	1	4-DIGIT' DISPLAY LOOM	

Credit Displays



Part Number	Pack Qty	Description	
7211	1	4-DIGIT' DISPLAY PLUS BRACKET	

Change giver Spares

Change giver Spine



Part Number	Pack Qty	Description	
182951001	5	CHANGER SPINE	

Control Board Back Cover



Part Number	Pack Qty	Description	
160246001	1	CHANGER CONTROL BOARD BACK COVER	

Cash Box Route Cover



Part Number	Pack Qty	Description	
160157001	1	CHANGER CASH BOX ROUTE COVER	

Acceptor Retaining Clip




Part Number	Pack Qty	Description	
160144001	20	CHANGER RETAINING CLIP	


Grommet Strap





Part Number	Pack Qty	Description	
160306001	20	CHANGER GROMMET STRAP	


Changegiver Spares


Blank Grommet (Small)			
Part Number	Pack Qty	Description	
160291001	100	CHANGEGIVER BLANK GROMMETS (SMALL)	

Blank Grommet (Large)			
Part Number	Pack Qty	Description	
724179001	50	CHANGER BLANK GROMMETS (LARGE)	

Mounting Plate			
Part Number	Pack Qty	Description	
160131001	20	CHANGER MOUNTING PLATE	
This mounting plate is fitted at the top of the changegiver spine to form the top two fixing points for the changegiver to the machine.			

Fem Cover			
Part Number	Pack Qty	Description	
160115001	10	F.E.M. MODULE COVER	

Changegiver Labels			
Part Number	Pack Qty	Description	
728322001	50	CF560 DUAL I/F LABEL	

Acceptor/Control Board Loom (CF5xx)			
Part Number	Pack Qty	Description	
160377001	5	CF5XX ACCEPTOR TO CONTROL BOARD LOOM	

Change giver Spares

Acceptor/Control Board Loom (CF69x)



Part Number	Pack Qty	Description	
724108001	10	CF69X ACCEPTOR TO CONTROL BOARD LOOM	

Loom Dressing Cover



Part Number	Pack Qty	Description	
160071001	20	CHANGER LOOM DRESSING COVER	

BVI

Bill Validator Module



Part Number	Pack Qty	Description	
179463001	1	BVI MODULE ASSEMBLY 1,2,5	

The Bill Validator Interface (BVI) when connected to a MEI CASHFLOW® change giver allows simple interfacing with Bill Validators. To connect to a specific Bill Validator, you need to order a specific type of interface loom.

Bill Validator Interface and Looms



Part Number	Pack Qty	Description	
170942004	1	BVI LOOM CBV M-IVO 15 WAY MOLEX	
170944003	1	BVI LOOM CBV 8 WAY JONES	
172042001	1	BVI LOOM VFM3 9-WAY MATE'N LOCK	
172048003	1	BVI LOOM VFM3 15-WAY JONES	
181227001	1	BVI LOOM CBV/VERIVAL-F/LEADS	

Acceptor/Creditor/Totaliser Spares

Discriminator Components / Software



Part Number	Pack Qty	Description	
184877001	1	CF330 MASK SOFTWARE G1.1	

Machine Interface Loom (Others)



Part Number	Pack Qty	Description	
149837015	5	ACCEPTOR LOOM (MS130B1)	

Acceptor Discriminators (EURO)



Part Number	Pack Qty	Description	
190743035	1	350 DISCIMINATOR EU'5468 D/A STD424	
190755044	1	330 DISCRIMINATOR EU'5468 D/A STD212	
190756035	1	330 DISCIMINATOR EU'5468 D/A DUALPOL	
190757043	1	330 DISCIMINATOR EU'5468 D/A SERIAL	
197827004	1	430 DISCRIMINATOR - EU'5468 D/A STD112	

Acceptor Discriminators (UK)



Part Number	Pack Qty	Description	
190758039	1	330 DISCIMINATOR GB'6776 D/A DUALPOL	
725616004	1	330 DISCRIMINATOR GB'8574 W/A 5VOLT	
725618003	1	330 DISCRIMINATOR GB'6433 D/A 5VOLT	

Acceptor Discriminators (OTHER)



Part Number	Pack Qty	Description	
190741031	1	350 DISCIMINATOR BR'0595 W/A STD424	
190742022	1	350 DISCIMINATOR UA'9582 W/A STD424	
190742027	1	350 DISCIMINATOR SW'0372 D/A STD424	
190747033	1	350 DISCIMINATOR NO'0414 D/A STD424	
190749032	1	350 DISCRIMINATOR HU'4233 D/A STD424	
190750033	1	330 DISCRIMINATOR CN'1243 D/A STD212	
190750038	1	330 DISCRIMINATOR CZ'1248 D/A DUAL POLARITY	
190752037	1	330 DISCRIMINATOR AS'3188 D/A DUAL POLARITY	
190754036	1	330 DISCRIMINATOR TR'9761 D/A STD112	
190755027	1	330 DISCRIMINATOR IS'8236 D/A DUAL POLARITY	
190759042	1	330 DISCIMINATOR SW/JTKN D/A STD212	
191371015	1	340 DISCIMINATOR IS'8236 D/A 4PLAYER	
191373019	1	340 DISCIMINATOR SW'0372 D/A 1PLAYER	
191375018	1	340 DISCIMINATOR CZ'1248 D/A 1PLAYER	
191377017	1	340 DISCRIMINATOR CH'6215 D/A 1PLAYER	
192545016	1	450 DISCRIMINATOR NO'7245 D/A STD112	
192547015	1	450 DISCRIMINATOR NO'7245 D/A STD124	
192553005	1	440 DISCRIMINATOR NO'7245 D/A STD112	
192582005	1	440 DISCRIMINATOR CH'6215 D/A SERIAL	
712442003	1	330 DISCRIMINATOR UA'9582 W/A STD124	

Acceptor Discriminators are factory programmed to work in a particular MEI CASHFLOW® product. Ensure that the correct coinset profile is requested when placing your order.

12 Volt Accept Gate Module



Part Number	Pack Qty	Description	
149831030	1	ACCEPT GATE MODULE 12V ARD, RLS	
149836029	1	ACCEPT GATE MODULE 12V ALD, RRD	

Acceptor Exit Plates



Part Number	Pack Qty	Description	
188622001	50	LEFT HAND EXIT PLATE	

Exit plates are fitted to all MEI CASHFLOW® discriminators. It is very important to order the correct type of exit plate, otherwise coin jams may occur. Accept Left exit plates are used on discriminators where the accepted coins are routed to the left.

Acceptor Interface PCB STD 112



Part Number	Pack Qty	Description	
149823002	5	INTERFACE PCB (STD 112)	

The Standard 112 interface PCB is intended for use with equivalent 12 volt applications. E.g. MS130, MS130B1 and ME180 products.

Acceptor Interface PCB STD 124



Part Number	Pack Qty	Description	
149821003	5	INTERFACE PCB (STD 124)	

The Standard 124 interface PCB is intended for use with equivalent 24 volt applications. E.g. MS130, MS130B1 and ME180 products.

Acceptor Interface PCB STD 2/3



Part Number	Pack Qty	Description
149829004	5	INTERFACE PCB (STD 2/3)

The Standard 2/3 interface (12 volt) PCB provides two interfaces on one PCB, Standard 212 and 312. The 212 is equivalent to an NRI G13 and CCL C-120 interface. The 312 is equivalent to an Azkoyen L60.

Acceptor Interface PCB STD 412



Part Number	Pack Qty	Description
723547001	5	INTERFACE PCB (STD 412)

The Standard 412 interface PCB is a 12 volt interface that can be fitted to a MEI CASHFLOW® 350 totaliser product. It's equivalent to an MS150 and NRI G13 - 12 volt application.

Acceptor Interface PCB STD 424



Part Number	Pack Qty	Description
723550001	5	INTERFACE PCB (STD 424)

The Standard 424 interface PCB is a 24 volt interface that can be fitted to a MEI CASHFLOW® 350 totaliser product. It's equivalent to an MS150 and NRI G13 - 24 volt application.

Acceptor Interface PCB DUAL POLARITY



Part Number	Pack Qty	Description
149825001	5	INTERFACE PCB (DUAL POLARITY)

The Dual Polarity interface PCB is a 12 volt interface that is equivalent to the MS111, MS111B1, ME111 and ME115 products.

Acceptor Interface VIDEO CREDITOR PCB



Part Number	Pack Qty	Description	
149827005	5	INTERFACE PCB (VIDEO CREDIT)	

This interface PCB can be used only on the MEI CASHFLOW® 340 series creditor.

Acceptor Interface PCB Back Cover



Part Number	Pack Qty	Description	
149834008	10	INTERFACE PCB BACK COVER	

The Interface Back Cover provides protection to the interface PCB. Its also polarised to allow for a variation of connectors to be fitted.

Acceptor Coin Cups



Part Number	Pack Qty	Description	
149846017	10	COIN CUP FRONT	

Acceptor Back Covers (Top Entry)



Part Number	Pack Qty	Description	
149832009	10	TOP ENTRY BACK COVER	

Acceptor Back Covers (Front Entry)



Part Number	Pack Qty	Description	
149837010	10	FRONT ENTRY BACK COVER	

Remote Rejects



Part Number	Pack Qty	Description	
149867001	1	REMOTE REJECT MODULE	
161025002	10	REMOTE REJECT & CHUTE	
161027001	10	REMOTE REJECT MODULE	

This Remote Reject without an entry chute, fits to any 4" top entry MEI CASHFLOW® acceptor. It provides an automatic reject mechanism that allows the acceptor to be mounted almost anywhere inside a machine. It requires a 12 volt DC supply to operate.

CF1xx Series Spares

Acceptor Coin Cups



Part Number	Pack Qty	Description	
33-11-2151	1	COIN CUP FRONT	

CF115/125/126/129 Reject Covers



Part Number	Pack Qty	Description	
199245003	1	CF1XX 'C' REJECT COVER	
199247002	1	CF1XX 'B' REJECT COVER	
199249001	1	CF1XX 'A' REJECT COVER	

CF111/130 Reject Covers



Part Number	Pack Qty	Description	
199241005	1	CF111 \ 130 REJECT COVER 'B' 10PK	
199243004	1	CF111 \ 130 REJECT COVER 'A' 10PK	
199249006	1	CF111 \ 130 REJECT COVER 'C' 10PK	

Reject Levers

Part Number	Pack Qty	Description	
710588001	1	HIGH LIFT REJECT LEVER MK2	

CF95xx Series Spares

Acceptor Coin Cups



Part Number	Pack Qty	Description	
728513001	1	CF95xx HOOKED COIN CUP	

CF95xx Reject Covers



Part Number	Pack Qty	Description	
730713003	1	CF95xx REJECT COVER TYPE C	
730715002	1	CF95xx REJECT COVER TYPE B	
730717001	1	CF95xx REJECT COVER TYPE A	

Reject Levers



Part Number	Pack Qty	Description	
710586002	1	CF95xx YELLOW REJECT LEVER	

CF1xx / 95xx Series Spares

DCE Bezel (Universal)



Part Number	Pack Qty	Description	
168362001	1	UNIVERSAL DCE BEZEL	

DCE Bezel (EURO)



Part Number	Pack Qty	Description	
168368003	1	EURO DCE BEZEL	

DCE Bezel (Coin)



Part Number	Pack Qty	Description	
192431002	1	DCE BEZEL 5P TO 2PND	

DCE Bezel (Coin & Token)



Part Number	Pack Qty	Description	
705543001	1	5p TO £2 COIN AND TOKEN BEZEL	

DCE Bezel Plate



Part Number	Pack Qty	Description	
28-13-0893	1	DCE ENTRY GUIDE PLATE	

Front Entry Bezel



Part Number	Pack Qty	Description	
33-11-0442	1	FRONT ENTRY BEZEL	

Bezel Button



Part Number	Pack Qty	Description	
33-11-0400	1	DIFFUSER BEZEL BUTTON	
33-11-3724	1	BEZEL BUTTON	

Bezel Button Accessory




Part Number	Pack Qty	Description	
33-11-0696	1	WEAR PAD BEZEL BUTTON	

Front Plate Mounting Plate



Part Number	Pack Qty	Description	
33-11-0785	1	MOUNTING PLATE	

Bezel Clips



Part Number	Pack Qty	Description	
33-11-3708	1	LOWER CLIP	
33-11-3716	1	UPPER CLIP	

Y-Chute



Part Number	Pack Qty	Description	
72-03-3209	1	STD Y-CHUTE	

PCB Cover



Part Number	Pack Qty	Description	
33-11-0808	1	VALIDATOR PCB COVER	

Acceptor Coin Cup Adaptor

Part Number	Pack Qty	Description	
33-11-3368	1	COIN CUP ADAPTOR	

Acceptor Indirect Entry Lid

Part Number	Pack Qty	Description	
33-11-2876	1	INDIRECT ENTRY LID	


Acceptor Indirect Entry Deck

Part Number	Pack Qty	Description	
33-11-3457	1	INDIRECT COIN ENTRY DECK	

Reject Lever Spring

Part Number	Pack Qty	Description	
49-04-0192	1	REJECT LEVER SPRING	

4-Way Separator Module

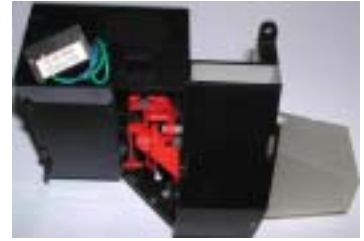

Part Number	Pack Qty	Description	
72-11-3484	1	4 WAY SEPARATOR	

8-Way Separator Module




Part Number	Pack Qty	Description	
199430001	1	8 WAY SEPARATOR	

MS126 Separator Chute Base



Part Number	Pack Qty	Description	
33-11-2363	1	CHUTE BASE	

Front Plates

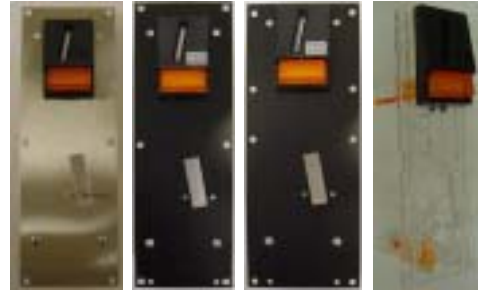

Part Number	Pack Qty	Description	
7802	1	7802 FRONT PLATE TYPE C	
7804	1	7804 FRONT PLATE TYPE A	
7805	1	7805 FRONT PLATE TYPE B	
7819	1	7819 BASIC FRONT PLATE	

CF1xx / 95xx Miscellaneous Spares

Validator Screws



Part Number	Pack Qty	Description	
17-11-0204	1	NO 6 x 5/16 COIN CUP SCREW	

Channel Pins



Part Number	Pack Qty	Description	
33-11-2266	1	PLASTIC CHANNEL PIN LONG	

CF129 Series Spares

Channel



Part Number	Pack Qty	Description	
28-13-0877	1	CF129 METAL CHANNEL	

Manifold Assembly



Part Number	Pack Qty	Description	
72-52-2925	1	LONG SHORT MANIFOLD ASSEMBLY	

Manifold Clip (Left)



Part Number	Pack Qty	Description	
150311001	1	LEFT HAND MANIFOLD CLIP	

Manifold Clip (Right)



Part Number	Pack Qty	Description	
150319002	1	RIGHT HAND MANIFOLD CLIP	

Collar Plate



Part Number	Pack Qty	Description	
150719001	1	TUBE COLLAR PLATE	

ME129 Clip



Part Number	Pack Qty	Description	
33-11-3782	1	VALIDATOR CLIP	

CF4xx Selector Spares

Selector Separator Modules



Part Number	Pack Qty	Description	
149846012	5	CF4XX 12V ACCEPT RIGHT SEPARATOR 5 BASE EXIT	
149846034	5	CF4XX 12V ACCEPT RIGHT SEPARATOR 3BASE&2SIDE EXITS	
149848011	5	CF4XX 12V ACCEPT LEFT SEPARATOR 3BASE&2SIDE EXITS	
722591001	5	CF4XX 24V AL SEPARATOR 3BASE&2SIDE EXITS	

Selector Reject Lever



Part Number	Pack Qty	Description	
149842019	10	CF450 REJECT LEVER	

Selector to Separator Loom



Part Number	Pack Qty	Description	
149840015	10	CF4XX SEPARATOR LOOM A/RIGHT	
149848016	10	CF4XX SEPARATOR LOOM ACCEPT LEFT	

The selector separator loom allows connectivity from the back of the discriminator to the separator module. There is a choice of two looms available, either for left side separator mounting or for right side mounting.

Selector Separator Module Parts



Part Number	Pack Qty	Description	
184762001	1	CF4XX SEPARATOR PCB	
715436001	20	CF4XX AR SEPARATOR LONG PEG	
715449001	10	CF4XX SEPARATOR 24VDC SOLENOID	
715452001	10	CF4XX SEPARATOR 12VDC SOLENOID	
715465001	50	CF4XX SEPARATOR GATE 2	
715478001	50	CF4XX SEPARATOR GATE 32	
715481001	50	CF4XX SEPARATOR GATE 31	
715494001	50	CF4XX SEPARATOR GATE 1	
715509001	20	CF4XX AR SEPARATOR SHORT PEG	

CF35x Totaliser Spares

Credit Displays



Part Number	Pack Qty	Description	
184157001	5	TOTALISER DISPLAY I/F KIT	

Totaliser Channel



Part Number	Pack Qty	Description	
149841006	5	CF35X TOTALISER CHANNEL	

Totaliser Accept Chute



Part Number	Pack Qty	Description	
149847008	10	CF35X TOTALISER ACCEPT CHUTE	

Totaliser Reject Chute



Part Number	Pack Qty	Description	
149849007	10	CF35X TOTALISER REJECT CHUTE	

Totaliser Power Supply Units




Part Number	Pack Qty	Description	
165794007	1	CF35X 110VAC 2PRICE MK2 PSU	
165796001	1	CF35X 240VAC 2PRICE MK2 PSU	
190471002	5	CF35X 240VAC 1 PRICE PSU	
190471007	5	CF35X 110VAC 2 PRICE PSU	
190473001	5	CF35X 240VAC 2 PRICE PSU	
190475005	5	CF35X 24VAC 2 PRICE PSU	
190479008	5	CF35X 24VAC 2PRICE/FN LOOM	
711335115	1	CF35X 115VAC FUSED TRANSFORMER PSU	

There are a number of totaliser PSU voltage variants available. The PSU can be mounted inside the metal channel or remotely inside the machine. Two versions are available for connection to old style 0v common interface PCB's and the new standard 4 PCB's.

Front Plate Spares

Front Plates and Accessories (Mini)



Part Number	Pack Qty	Description	
161041002	10	MINI FRONT PLATE WITH DISPLAY	
161043001	10	MINI FRONT PLATE - 10 PACK	
705394001	1	MINI FRONT PLATE	

The Mini front plate measures 115mm x 63mm. It is particularly appropriate for mounting in to machines where space is limited. However, for added security it is advisable to consider fitting a MAXI front plate.

Front Plates and Accessories (Midi)



Part Number	Pack Qty	Description	
161030001	10	MIDI FRONT PLATE - 10 PACK	
161038002	10	MIDI FRONT PLATE WITH DISPLAY	
705381001	1	MIDI FRONT PLATE	
713112001	10	MIDI FRONT PLATE (BLACK)	

The Midi front plate measures 155mm x 63mm. It is particularly appropriate for mounting in to machines where space is limited. However, for added security it is advisable to consider fitting a MAXI front plate.

Front Plate Labels Mini/Midi

1c,2c,5c,
10c,20c,50c

Part Number	Pack Qty	Description	
728260002	50	FRONT PLATE LABEL 1,2,5,10,20,50c	
728262001	50	FRONT PLATE LABEL 1,2,5,10,20,50,1,2€	
728268003	50	FRONT PLATE LABEL 5,10,20,50,1,2€	


Front Plates and Accessories (Maxi)



Part Number	Pack Qty	Description	
149012003	10	MAXI FRONT PLATE ACCEPT CHUTE	
166920001	10	MAXI FRONT PLATE	
166959001	10	MAXI FRONT PLATE ENTRY BEZEL	
166975001	10	MAXI FRONT PLATE REJECT BEZEL	
166991001	10	MAXI MOUNTING PLATE	
167010001	10	MAXI FRONT PLATE KIT & MOUNTING PLATE	
167023001	10	MAXI FRONT PLATE KIT	
167036001	10	MAXI FRONT PLATE WITH REJECT BEZEL	
167049001	10	MAXI FRONT PLATE KIT WITHOUT ENTRY BEZEL	

The Maxi front plate measures 237mm x 77mm. It's designed to offer maximum possible security. A remote coin entry and a convoluted entry path makes fraudulent access difficult even when manipulative devices are used. Maxi plates are supplied in kit form.

Front Plate Labels Maxi



Part Number	Pack Qty	Description	
728271003	50	MAXI FRONT PLATE LABEL 5,10,20,50,1,2€	

Adaptor Spares

4" Adaptor With Mounting Lugs



Part Number	Pack Qty	Description
149848033	4	SELECTOR 4" CHANNEL

4" Adaptors are available with or without mounting lugs. These adaptors allow for mounting a MEI CASHFLOW® acceptor so that, fitting to specific machine applications can be achieved.

5" Adaptor Kits



Part Number	Pack Qty	Description
182640007	10	5" ADAPTOR (TOTALISER)
182642001	10	5" ADAPTOR (TYPE 1, REJECT B)
182642006	10	5" ADAPTOR (TYPE 2, 5-WAY SELECTOR)
182646004	10	5" ADAPTOR (DUAL PIN)
182648003	10	5" ADAPTOR (TYPE 2, REJECT A)

A 5" Adaptor allows a 4" MEI CASHFLOW® Acceptor to be converted to a 5" standard size thus allowing it to be fitted to specific machines. These have fixed channel pins fitted in different height positions. Refer to Appendix C for more details.

Adaptor Spares

Adaptor Chute



Part Number	Pack Qty	Description	
149843022	10	5" ADAPTOR REJECT CHUTE COVER 'B'	

Adaptor Chute Cover



Part Number	Pack Qty	Description	
709712001	10	5" ADAPTOR ACCEPT CHUTE COVER	

Adaptor Chute Type 1 to 4



Part Number	Pack Qty	Description	
709678001	10	TYPE 1 ACCEPT CHUTE	
709681001	10	TYPE 2 ACCEPT CHUTE	
709694001	10	TYPE 3 ACCEPT CHUTE	
709709001	10	TYPE 4 ACCEPT CHUTE	

Audit Spares

Audit 900 Optics Module



Part Number	Pack Qty	Description
117401003	1	AUDIT 900 OPTICS MODULE

Audit Advance Optokit



Part Number	Pack Qty	Description
163374004	1	AUDIT ADVANCED OPTOKIT

Audit 900 Printokit



Part Number	Pack Qty	Description
163376003	1	AUDIT 900 PRINTOKIT

Audit 900 Connectokit



Part Number	Pack Qty	Description	
163378002	1	AUDIT 900 CONNECTOKIT	

Audit 900 Optokit 15-Way

Part Number	Pack Qty	Description	
720133001	1	AUDIT 900 OPTOKIT 15WAY	

Audit 900 FEM Module



Part Number	Pack Qty	Description	
722646002	1	FEM AUDIT MODULE	

Mars® Audit 900 Fem module can be fitted into the MEI CASHFLOW® change giver to collect transaction data that can later be viewed by use of a Mars® Route Alpha 250 terminal.

Audit Printokit Loom



Part Number	Pack Qty	Description	
169436001	1	AUDIT PRINTOKIT LOOM	

Mars® Audit 900 Printokit loom can also be purchase as a spare. It's fitted with a 15-way D type connector suitable for connection to a Mars® audit 920 printer.

Audit Connectokit Loom



Part Number	Pack Qty	Description	
169449001	5	AUDIT CONNECTOKIT LOOMS	

Mars® Audit 900 Connectokit loom can also be purchase as a spare. It's fitted with a robust connector suitable for connection to a Mars® MEQ hand-held terminal.

Audit Optokit Loom



Part Number	Pack Qty	Description	
169452001	5	AUDIT OPTOKIT LOOMS	

Mars® Audit 900 Optokit loom can also be purchase as a spare. It's suitable for connecting the MEI CASHFLOW® change giver to the Mars® audit 900 Optics module.


Audit Printer and Spares





Part Number	Pack Qty	Description	
141283001	1	AUDIT 920 PRINTER	
167243001	1	920 PRINTER DATE+TIME KIT	
189123001	20	920 PRINTER PAPER ROLLS 7192	
189134002	10	920 PRINTER RIBBONS 7192	


Mars® Audit 920 Printer is a handheld printer suitable for use with MS/ME and MEI CASHFLOW® products. It comes complete with carrying strap, paper, cartridge and a magnetic clasp that allows the printer to be secured in to the inside of the machine.

WSM Spares

WSM System			
			
Part Number	Pack Qty	Description	
725898301	1	WORKSHOP MODULE SYSTEM	

Credit Store			
			
Part Number	Pack Qty	Description	
740040001	1	CREDIT STORE PLUS 100 CREDITS	

WSM Spare CD			
			
Part Number	Pack Qty	Description	
740037001	1	WORKSHOP MODULE CD	

HII Adaptor & Loom			
			
Part Number	Pack Qty	Description	
727410001	1	HII ADAPTOR & LOOM	

WSM Spares

<i>Test Stand</i>			
Part Number	Pack Qty	Description	
726744001	1	WORKSHOP MODULE TEST STAND	

Route Alpha Spares

Route Alpha Terminals



Part Number	Pack Qty	Description	
120557004	1	ROUTE ALPHA 250	
197001001	1	ROUTE ALPHA 240	

The Mars® Route Alpha 240 & 250 Terminals are simple to use handhelds. They allow access to programmable features and data on MEI CASHFLOW® products. The 250 terminal gives access to most programmable addresses were the 240 gives access to a further more.

Route Alpha Loom



Part Number	Pack Qty	Description	
149834020	10	ROUTE ALPHA FIB LOOM	

Route Alpha Upgrade Software



Part Number	Pack Qty	Description	
169752004	5	ROUTE ALPHA 250 SOFTWARE	
721383001	5	ROUTE ALPHA 240 S/W (USA-V1.70)	

The V1.70 Route Alpha is intended for use with American products (Not for Europe).

Service Alpha

Service Alpha Equipment



Part Number	Pack Qty	Description	
157950002	1	SERVICE ALPHA GENERIC KIT-RENTAL	
158157300	1	12 MONTH GLOBAL ENABLE LICENCE	
165194001	1	SERVICE ALPHA CASHFLOW KIT	

Service Alpha Product Looms



Part Number	Pack Qty	Description	
158160001	2	SERVICE ALPHA MS1000 LPV LOOMS	
158186001	2	SERVICE ALPHA ME181 LOOMS	
158199001	2	SERVICE ALPHA MS150 LOOMS	
158204001	2	SERVICE ALPHA MS130 B1 LOOMS	
158217001	2	SERVICE ALPHA MS130 LOOMS	
158220001	2	SERVICE ALPHA MS110 LOOMS	
158233001	2	SERVICE ALPHA MS100 B1 LOOMS	
158246001	2	SERVICE ALPHA MS111 LOOMS	
158259001	2	SERVICE ALPHA MS15/25 LOOMS	
158262001	2	SERVICE ALPHA MS12 LOOMS	
164444001	2	SERVICE ALPHA FIB CHANGER LOOMS	
164457001	2	SERVICE ALPHA HI2 LOOMS	
164973001	2	SERVICE ALPHA MS1400 LOOMS	

Service Tools

CPM



Part Number	Pack Qty	Description	
725934001	1	CASHFLOW PROGRAMMING MODULE (CPM)	
725947001	1	CPM LOOM	

CPM Holster



Part Number	Pack Qty	Description	
729072001	1	CPM HOLSTER	

CPM Spares



Part Number	Pack Qty	Description	
149881002	1	USB CABLE TYPE A-B 2M LONG	

Test Box & Loom Kit (EMTB)



Part Number	Pack Qty	Description
725007001	1	CASHFLOW EMTB TEST BOX
726702001	1	EMTB ADAPTER LOOM KIT

These test boxes are suitable for testing most MEI CASHFLOW® change giver and acceptor products. The EMTB (Electro-Mechanical) is suitable for most change giver interface types. The MITB (Multi-Interface) can be used for acceptor, totaliser and selector products.

Test Box & Loom Kit (MITB)



Part Number	Pack Qty	Description
725010001	1	CASHFLOW MITB TEST BOX
725049001	1	MITB ACCEPTOR LOOM KIT

MDB Host Simulator Box



Part Number	Pack Qty	Description
185776001	1	MDB HOST SIMULATOR TEST BOX

APPENDIX - A

Machine Interface Wiring Tables

Machine Loom T1 (Executive)

Pin	Function	Colour
1	Live	Brown
2	Neutral	Blue
3-15	-	-



Machine Loom T2 (BDV)

Pin	Function	Colour
1	-dc	Blue
2	+dc	Brown
3	-	-
4	-	-
5	Tx+	Red
6	Tx-	Black
7	Rx+	White
8	Rx-	Green
9	Screen	Braid



Machine Loom T3 (1 price)

Pin	Function	Colour
1	Price Common Live	Red/Brown
2	Neutral	Blue
3	Price 1	Orange
4	No connection	-
5	Exact Change	White/Brown
6	Blocker	Violet
7	Safety	Grey
8	-	-



Machine Loom T4 (4 price)

Pin	Function	Colour
1	Price Common Live	Red/Brown
2	Neutral	Blue
3	Price 1	Orange
4	Price 2	Yellow
5	Exact Change	White/Brown
6	Blocker	Violet
7	Price 3	Green
8	Price 4	Black



Machine Loom T5 (4 price)

Pin	Function	Colour
1	Price Common Live	Red/Brown
2	Neutral	Blue
3	Price 1	Orange
4	Price 2	Yellow
5	Price 3	Green
6	Blocker	Violet
7	Safety	Grey
8	Escrow	White
9	Exact Change	White/Brown
14	Price 4	Black



Machine Loom T6 (3 price)

Pin	Function	Colour
1	Price Common Live	Red/Brown
2	Neutral	Blue
3	Price 1	Orange
4	Price 2	Yellow
5	Exact Change	White/Brown
6	Blocker	Violet
7	Safety	Grey
8	Price 3	Green



Machine Loom T7 (4 price)

Pin	Function	Colour
1	Live	Brown
2	Neutral	Blue
3	-	-
4	Price 4	Black
5	Price 3	Green
6	Blocker	Violet
7	Safety	Grey
8	Escrow	White
9	Exact Change	White/Brown
10	Price 2	Yellow
11	Price 1	Orange
12	Price Common	Red



Machine Loom T8 (4 price)

Pin	Function	Colour
1	Live	Brown
2	Neutral (Linked to Pin 15)	Blue
3	-	-
4	-	-
5	(Linked to Pin 6)	
6	Blocker (Linked to Pin 5)	Violet
7	Safety	Grey
8	Escrow	White
9	Exact Change	White/Brown
10	-	-
11	Price 1	Orange
12	Price 2	Yellow
13	Price 3	Green
14	Price 4	Black
15	Price Common(Linked to Pin 2)	Red



Machine Loom T9 (4 price)

Pin	Function	Colour
1	Live Price Common	Red/Brown
2	Neutral	Blue
3	Price 1	Orange
4	Price 2	Yellow
5	Price 3	Green
6	Blocker	Violet
7	Safety	Grey
8	Escrow	White
9	Exact Change	White/Brown
10 - 13	-	-
14	Price 4	Black
15 - 18	-	-



Machine Loom T10 (Exec+)

Pin	Function	Colour
1	Live	Brown
2	Neutral	Blue
3-8	-	-
9	Exact Change	White/Brown
10-15	-	-



Machine Loom T11 (4 Price)

Pin	Function	Colour
1	Price 1	Orange
2	Price 2	Yellow
3	Price 3	Green
4	Price 4	Black
5-9	-	-
10	Live Price Common	Red/Brown
11	Blocker	Violet
12	Escrow	White
13	Safety	Grey
14	-	-
15	Neutral	Blue



Machine Loom T12 (4 price)

Pin	Function	Colour
1	Live Price Common	Red/Brown
2	Neutral	Blue
3	Price 1	Orange
4	Price 2	Yellow
5	Price 3	Green
6	Blocker	Violet
7	Price 4	Black
8	Exact Change	White/Brown
9	Credit Relay 1	White/Red
10	Credit Relay 2	White/Violet
11-15	-	-

Machine Loom T13 (4 price)

Pin	Function	Colour
1	Price Common Live	Red/Brown
2	Neutral	Blue
3	Price 1	Orange
4	Price 2	Yellow
5	Price 3	Green
6	Blocker	Violet
7	Safety	Grey
8	Escrow	White
9	Exact Change	White/Brown
10	-	-
11	Price 4	Black
12	-	-



Machine Loom T14 (4 price)

Pin	Function	Colour
1	Price Common Live	Red/Brown
2	Neutral	Blue
3	Price 1	Orange
4	Price 2	Yellow
5	Price 3	Green
6	Blocker	Violet
7	Safety	Grey
8	Escrow	White
9	Exact Change	White/Brown
10	Price 4	Black
11	-	-
12	-	-



Machine Loom CF5xx (MDB)

Pin	Function	Colour
1	+34V	Brown
2	Ground	Blue
3	-	-
4	Master Rx	Yellow
5	Master Tx	Red
6	MDB Com	Green



Machine Loom (MDB) Multi-interface

Pin	Function	Colour
1	+34V	Brown
2	Ground	Blue
3	-	-
4	Master Rx	Yellow
5	Master Tx	Red
6	MDB Com	Green



Machine Loom (APR 6 price)

Pin	Function	Colour
1	Live	Brown
2	Neutral	Blue
3	Price 5	Grey
4	Price 6	Red
5	Price 1	Orange
6	Price 4	Black
7	Price 3	Green
8	Vend Start	Violet
9	Price 2	Yellow
10	Exact Change	White/Brown



Protocol A Loom

Pin	Function	Colour
1	Screen	Screen
2	Polarising	
3	Tx-	Black
4	Rx-	Green
5	Tx+	Red
6	Rx+	White
7-9	-	-



APPENDIX - B

Interface PCB's Pin outs

Range of PCB's for various Products

Interface	CashFlow® Product				
	330	340	350	360	4xx
Std 112,124	✓				✓
Std 2/3	✓				✓
Std 412,424			✓	✓	
Dual Polarity	✓				
Creditor		✓			

Standard 112 interface PCB

Function	Pin	Pin	Function
INH C	1	2	INHE
INH D	3	4	INHF
ER	5	6	ALLINH
OP C	7	8	GND
OP F	9	10	OPD
OP E	11	12	OPB
OP A	13	14	INHB
INH A	15	16	SUPPLY



Standard 124 interface PCB

Function	Pin	Pin	Function
INH C	1	2	INHE
INH D	3	4	INHF
ER	5	6	ALLINH
OP C	7	8	GND
OP F	9	10	OPD
OP E	11	12	OPB
OP A	13	14	INHB
INH A	15	16	SUPPLY



Standard 312 PCB

Pin	Function
1	SUPPLY
2	GND
3	OPA
4	OPB
5	OPC
6	ALLINH
7	OPD
8	INHR1
9	INHR2
10	INH



Standard 212 PCB

Function	Pin	Pin	Function
GND	1	2	SUPPLY
OPE	3	4	OPF
ER	5	6	ALLINH
OPA	7	8	OPB
OPC	9	10	OPD



Dual Polarity Interface PCB

Pin	Function
1	OPA
2	OPB
3	OPCOM
4	OPF
5	POLARISING
6	OPE
7	OPD
8	POLARISING
9	OPC
10	INHC
11	SUPPLY
12	GND
13	INHD
14	INHE
15	INHF
16	INHB
17	INHA



Video Credit Interface PCB

Pin	Function
1	CREDIT
2	SUPPLY
3	E LAMP
4	SUPPLY
5	COIN METER
6	GND
7	P LAMP
8	SUPPLY
9	PLAYER 1 HI
10	PLAYER 1 LO
11	POLARISING
12	GND
13	DISPENSE 1
14	PLAYER 2
15	DISPENSE 2
16	PLAYER 3
17	DISPENSE 3
18	PLAYER 4
19	DISPENSE 4



Standard 412 Interface PCB

Function	Pin	Pin	Function
ER	1	2	ALLINH
INTDEF	3	4	GND
GND	5	6	PRICE 2
BLOCKER 2	7	8	BLOCKER
PRICE 1	9	10	SUPPLY



Standard 424 Interface PCB

Function	Pin	Pin	Function
ER	1	2	ALLINH
INTDEF	3	4	GND
GND	5	6	PRICE 2
BLOCKER 2	7	8	BLOCKER
PRICE 1	9	10	SUPPLY



APPENDIX - C


Adaptor Pin Positions and Coin Reject Paths

○ = No Pin Fitted

● = Pin Fitted


5" Adaptor (Type 1, Reject B)

5" Adaptor (Type 2, Reject A)

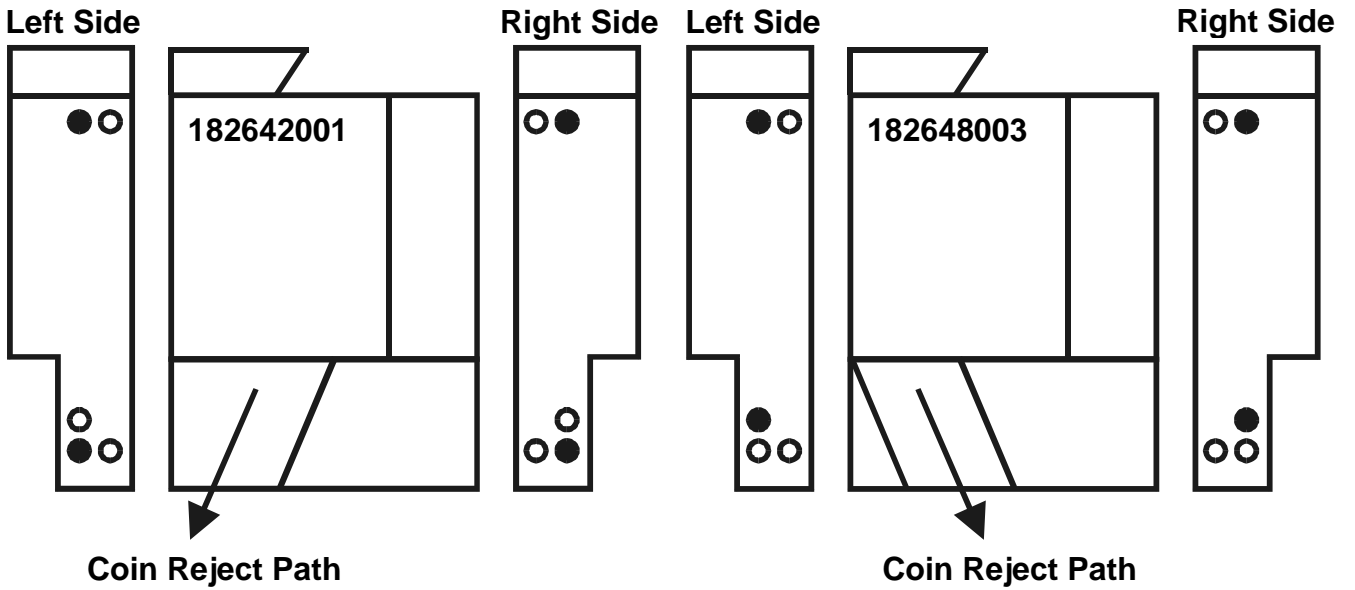

5" Adaptor (Type 1, 5-way Selector)

5" Adaptor (Type 2, 5-way Selector)

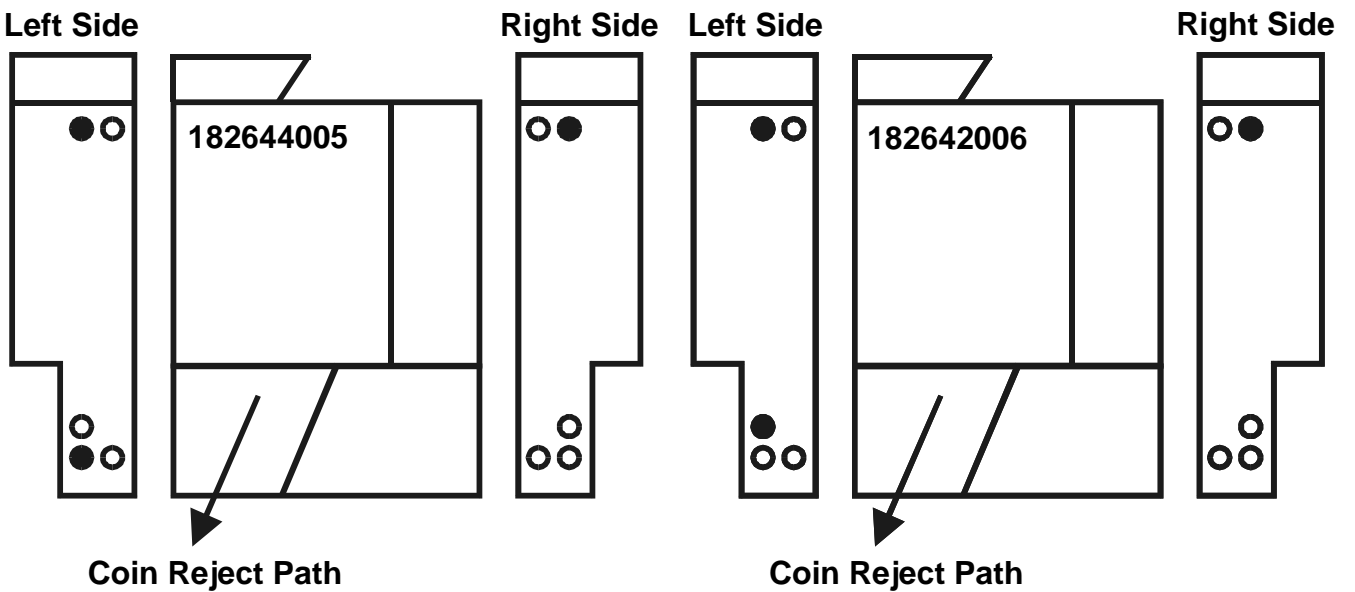

5" Adaptor Totaliser

5" Adaptor Dual Pin

